CRETABOIS



Material.	Glazed porcelain rectified
Size.	60x60
Thickness.	9mm
Finish.	Natural
Colours.	Blanc, Santal, Cerise
Application.	Inside / Floor

SETTECENTO
MANIFATTURA CERAMICA

Glazed porcelain rectified

CRETABOIS

02 /
BLANC

05 /
SANTAL

08 /
CERISE

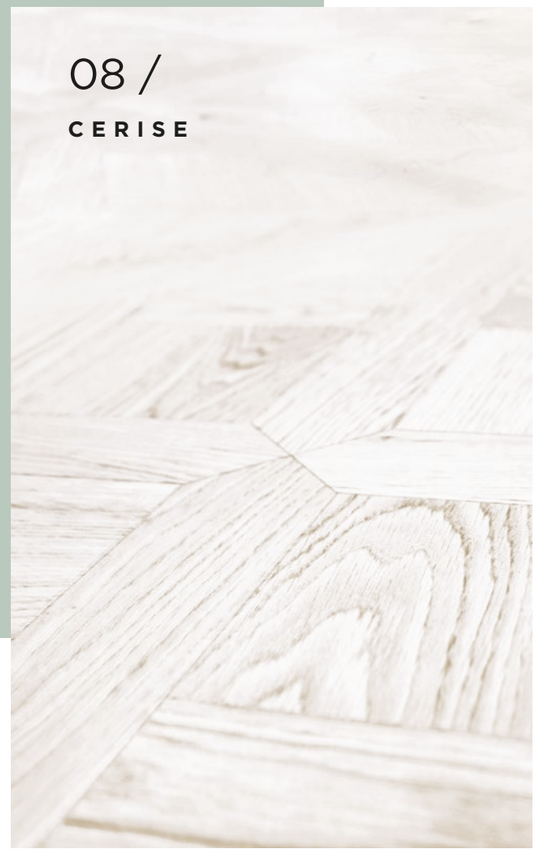

Cretabois eleva le essenze di legni naturali ad elegante tappeto decorativo.

Cretabois *transforms the essence of natural wood into an elegant cross inlay pattern, resulting in striking decorative compositions.*

SETTECENTO
MANIFATTURA CERAMICA



Floor / **Cretabois Blanc** · 60x60



Floor / **Cretabois Blanc** · 60x60



Floor / **Cretabois Santal** · 60x60



Floor / **Cretabois Santal** · 60x60



Floor / **Cretabois Cerise** · 60x60

CRETABOIS

Glazed porcelain rectified



Floor / **Cretabois Cerise** · 60x60

CARATTERISTICHE TECNICHE

Technical features
Caracteristiques tecniques
Technische Eigenschaften
Технические характеристики

CRETABOIS

9 MM | V2

BLANC

33 **116112** Blanc 60x60

SANTAL



33 **116110** Santal 60x60

CERISE



33 **116111** Cerise 60x60

CARATTERISTICHE TECNICHE

Technical features / Caracteristiques tecniques / Technische Eigenschaften / Технические характеристики

UNI EN ISO 14411 BIa A. G GL	Metodo di prova Testing method Teste d'essai Pruefmethode Методика испытаний	Valore Value Valeur Wert Величина
Assorbimento acqua Water absorption Absorption d'eau Wasseraufnahme Водопоглощение	ISO 10545.3	< 0,5 %
Resistenza alla flessione Bending strength Résistance à la flexion Biegezugfestigkeit Стойкость к изгибу	ISO 10545.4	Conforme
Resistenza all'attacco chimico Chemical resistance Résistance à l'attaque chimique Beständigkeit gegen Chemikalien Стойкость к химическому воздействию	ISO 10545.13	A
Resistenza alle macchie Stain resistance Résistance aux taches Fleckenbeständigkeit Стойкость к образованию пятен	ISO 10545.14	5
Anti scivolosità Anti-slip index Coéfficient anti-dérapage Trittsicherheitskoeffizient Характеристики устойчивости к скольжению	DIN 51097 ANSI A 137.1:2012	R10 A+B >0,42 wet
Resistenza all'abrasione Resistance to abrasion Résistance à l'abrasion Abriebhärte Стойкость к истиранию	ISO 10545.7	PEI 4 (Cerise) PEI 5 (Blanc, Santal)
Determinazione della resistenza al gelo Frost resistance index Coefficient de résistance au gel Feststellung der Frostbeständigkeit Определение морозостойкости	ISO 10545.12	Ingelivo Frost proof Ingelif Frostsicher Морозостойкая

IMBALLI

Packaging / Emballages / Verpackungen / Упаковка

	Mq/Box	Pcs/Box	Kg/Box	Mq/Pallet	Box/Pallet	Kg/Pallet
60x60 - 24"x24"	1,08	3	20,7	43,2	40	828,0

’SETTECENTO
MANIFATTURA CERAMICA

Ceramiche Settecento Valtresinaro S.p.A.
Via del Crociale, 21 - 41042 Fiorano Modenese (MO)
Tel. +39 0536 928711 - Fax +39 0536 928718
www.settecento.com - e-mail: info@settecento.com

Ceramics of Italy

GET IT ON Google Play

Download on the App Store